



S+S REGELTECHNIK

PART OF
BEMSIQ
GROUP



RYMASKON® 1000 RYMASKON® 2000/3000

BUS-CAPABLE ROOM CONTROL UNITS –
THE PERFECT SOLUTION FOR
INTELLIGENT INDIVIDUAL ROOM CONTROL



TOUCHKEYS



TOUCHPANEL



PRODUCT RANGE 2025

NEW

RYMASKON® 1000 RYMASKON® 2000 / 3000



The perfect solution for intelligent individual room control

For the extended product family of our modern **RYMASKON® 1000 / 2000 / 3000** individual room control units, we have developed the new Iduna housing series. In a timeless look with high-quality surfaces in white and black.

The graphic **design** with international symbols and multiple languages offers the perfect solution for all visible areas in the building. Intuitive operation is via touch keys or touch screen.

High-contrast **colour displays** with strong LED backlighting allow effortless reading up to a viewing angle of 85°, even under unfavourable conditions, such as strong solar irradiation.

It also **saves power** and is **environmentally friendly** with features such as automatic brightness adjustment, stand-by mode or wake-up function using hand gestures.



INTEGRATED SENSOR TECHNOLOGY



INTUITIVE CONTROL

The room climate can be monitored in up to 5 zones via the integrated **sensor technology**. The ability to detect open windows and a programmable reset function round out the features, which include the control of temperature, fan, sun protection and lighting. In this way, buildings can be operated in an **energy-optimised** and **environmentally-friendly** manner.

Interface and controller variants are available with a wide range of technical options. Optionally with communication interface (Modbus, W-Modbus, BACnet, KNX) or with active outputs (0-10 V).

Further **information** on the compact **RYMASKON® 1000** device series can be found on the following page.



Individual
front design
on request


S+S REGELTECHNIK

S+S ADDED VALUE

- Timeless design in the elegant Iduna housing (white or black colour)
- Intuitive operation with modern graphics via touch keys or touch screen
- Integrated environment sensor technology enables energy-efficient room ventilation and a comfortable climate
- Power-saving and environmentally friendly thanks to features, such as automatic brightness adjustment and reset, stand-by, wake-up, time control, etc.
- Extensive room lighting control with dimming function and advanced colour settings
- Many standard languages for menu control (DE, EN, FR, ES, IT, RU, others available upon request)
- Quick and easy installation (push-in terminals) and mounting (on in-wall flush box or on-wall)
- CuRA (Customized Register Assignment) Assignment of individual register addresses for each data point
- Wide range of configuration options






RYMASKON® 130x		Interface (basic models) Room control units for temperature adjustment					
Type / WG02	Communi- cation	Measuring element	Control system	Colour / Housing	Display	Item no.	Price
RYMASKON® 130x				Iduna 3	in-wall version		
RYM 1301-RH-MOD	Modbus	T RH	T – R	white		RYM1-3011-M210-000	220,12 €
RYM 1302-RH-MOD	Modbus	T RH	T – R	black		RYM1-3021-M210-000	220,12 €
RYM 1301-RH-WMOD	W-Modbus	T RH	T – R	white		RYM1-3011-W210-000	303,32 €
RYM 1302-RH-WMOD	W-Modbus	T RH	T – R	black		RYM1-3021-W210-000	303,32 €
RYMASKON® 130x AP				Iduna 3	on-wall version		
RYM 1301-RH-MOD-AP	Modbus	T RH	T – R	white		RYM1-3011-M211-000	220,12 €
RYM 1302-RH-MOD-AP	Modbus	T RH	T – R	black		RYM1-3021-M211-000	220,12 €
RYM 1301-RH-WMOD-AP	W-Modbus	T RH	T – R	white		RYM1-3011-W211-000	303,32 €
RYM 1302-RH-WMOD-AP	W-Modbus	T RH	T – R	black		RYM1-3021-W211-000	303,32 €

RYMASKON® 140x		Interface (basic models) Room control units for temperature and fan adjustment						
Type / WG02	Communi- cation	Measuring element	Control system	Colour / Housing	Display	Item no.	Price	
RYMASKON® 140x				Iduna 3	in-wall version			
RYM 1401-RH-MOD	Modbus	T RH	T F R	white		RYM1-4011-M210-000	220,12 €	
RYM 1402-RH-MOD	Modbus	T RH	T F R	black		RYM1-4021-M210-000	220,12 €	
RYM 1401-RH-WMOD	W-Modbus	T RH	T F R	white		RYM1-4011-W210-000	303,32 €	
RYM 1402-RH-WMOD	W-Modbus	T RH	T F R	black		RYM1-4021-W210-000	303,32 €	
RYMASKON® 140x AP				Iduna 3	on-wall version			
RYM 1401-RH-MOD-AP	Modbus	T RH	T F R	white		RYM1-4011-M211-000	220,12 €	
RYM 1402-RH-MOD-AP	Modbus	T RH	T F R	black		RYM1-4021-M211-000	220,12 €	
RYM 1401-RH-WMOD-AP	W-Modbus	T RH	T F R	white		RYM1-4011-W211-000	303,32 €	
RYM 1402-RH-WMOD-AP	W-Modbus	T RH	T F R	black		RYM1-4021-W211-000	303,32 €	
Measuring element / control system:	T = Temperature sensor (basic equipment) RH = Humidity sensor		T = Temperature F = Fan R = Room occupancy					


HIGHLIGHTS 1000

- 2.0" TFT display (320x240x3 RGB pixels) with LED backlighting, high contrast, 85° viewing angle
- Capacitive keys (touch keys)
- Housing Iduna 3 (112x89.5x24 mm), for wall-mounting on in-wall flush boxes or on-wall, quick and easy installation via push-in terminals
- Modbus connection or wireless W-Modbus
- Integrated sensor technology (temperature, humidity, CO2, VOC) with limit value monitoring
- Control of temperature, fan, sun protection (max. 2 circuits) and lighting with dimming function
- Controller unit type for heating convectors and fan coils, with continuous output [0-10V] or with 2-point or 3-point regulation (relay) for 2-pipe and 4-pipe systems
- CuRA (Customized Register Assignment)
Assignment of individual register addresses for each data point
- Power-saving and environmentally friendly thanks to features such as brightness adjustment, stand-by, wake-up, etc.



RYMASKON® 13xx C		Controller (basic model) for heating convectors (HC) for temperature adjustment					
Type / WG02 Control outputs	Communi-cation	Measuring element	Control system	Colour / Housing	Display	Item no.	Price
[1] 2 RO (heating, cooling, 230 V AC, max. 500 mA) + 1 AO (6-way valve, 0-10 V)							
RYMASKON® 131x C				Iduna 3	in-wall version		
RYM 1311C-RH-WMOD	W-Modbus	T RH	T – R	white		RYM1-3111-W220-000	318,77 €
RYM 1312C-RH-WMOD	W-Modbus	T RH	T – R	black		RYM1-3121-W220-000	318,77 €
[2] 3 AO (heating, cooling, 6-way valve, 0-10 V)							
RYMASKON® 132x C				Iduna 3	in-wall version		
RYM 1321C-RH-MOD	Modbus	T RH	T – R	white		RYM1-3211-M210-000	235,57 €
RYM 1322C-RH-MOD	Modbus	T RH	T – R	black		RYM1-3221-M210-000	235,57 €
RYM 1321C-RH-WMOD	W-Modbus	T RH	T – R	white		RYM1-3211-W210-000	318,77 €
RYM 1322C-RH-WMOD	W-Modbus	T RH	T – R	black		RYM1-3221-W210-000	318,77 €
[3] 2 AO (heating, cooling, 0-10 V) + 2 DO (heating, cooling, 24 V, max. 1 A resistive load)							
RYMASKON® 136x C				Iduna 3	in-wall version		
RYM 1361C-RH-MOD	Modbus	T RH	T – R	white		RYM1-3611-M210-000	235,57 €
RYM 1362C-RH-MOD	Modbus	T RH	T – R	black		RYM1-3621-M210-000	235,57 €
RYM 1361C-RH-WMOD	W-Modbus	T RH	T – R	white		RYM1-3611-W210-000	318,77 €
RYM 1362C-RH-WMOD	W-Modbus	T RH	T – R	black		RYM1-3621-W210-000	318,77 €

RYMASKON® 14xx C		Controller (basic models) for FAN COILS for temperature and fan adjustment						
Type / WG02 Control outputs	Communi- cation	Measuring element	Control system	Colour / Housing	Display	Item no.	Price	
[4] 3 AO (heating, cooling 6-way valve, EC fan, 0-10 V)								
RYMASKON® 143x C				Iduna 3	in-wall version			
RYM 1431C-RH-MOD	Modbus	T RH	T F R	white		RYM1-4311-M210-000	235,57 €	
RYM 1432C-RH-MOD	Modbus	T RH	T F R	black		RYM1-4321-M210-000	235,57 €	
RYM 1431C-RH-WMOD	W-Modbus	T RH	T F R	white		RYM1-4311-W210-000	318,77 €	
RYM 1432C-RH-WMOD	W-Modbus	T RH	T F R	black		RYM1-4321-W210-000	318,77 €	
[5] 5 RO (heating, cooling, 230 VAC, max. 500 mA 3-level fan, 230 VAC, max. 3 A)								
RYMASKON® 144x C				Iduna 3	in-wall version			
RYM 1441C-RH-WMOD	W-Modbus	T RH	T F R	white		RYM1-4411-W220-000	318,77 €	
RYM 1442C-RH-WMOD	W-Modbus	T RH	T F R	black		RYM1-4421-W220-000	318,77 €	
[6] 2 RO (heating, cooling, 230 VAC, max. 500 mA) + 1 AO (EC fan, 0-10 V)								
RYMASKON® 145x C				Iduna 3	in-wall version			
RYM 1451C-RH-WMOD	W-Modbus	T RH	T F R	white		RYM1-4511-W220-000	318,77 €	
RYM 1452C-RH-WMOD	W-Modbus	T RH	T F R	black		RYM1-4521-W220-000	318,77 €	
[7] 2 AO (heating, cooling, EC fan, 0-10 V) + 2 DO (heating, cooling, 24 V, max. 1 A resistive load)								
RYMASKON® 146x C				Iduna 3	in-wall version			
RYM 1461C-RH-MOD	Modbus	T RH	T F R	white		RYM1-4611-M210-000	235,57 €	
RYM 1462C-RH-MOD	Modbus	T RH	T F R	black		RYM1-4621-M210-000	235,57 €	
RYM 1461C-RH-WMOD	W-Modbus	T RH	T F R	white		RYM1-4611-W210-000	318,77 €	
RYM 1462C-RH-WMOD	W-Modbus	T RH	T F R	black		RYM1-4621-W210-000	318,77 €	

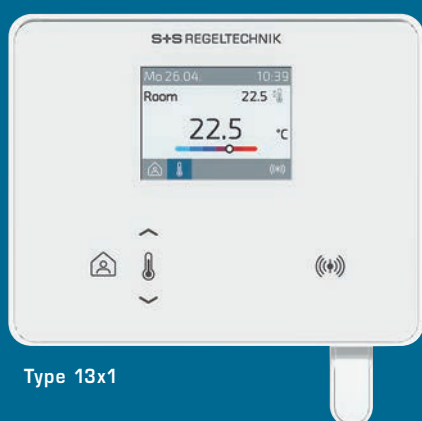

Type 13x1



Type 14x2



In-wall version



On-wall version

RYMASKON® 2000 C		Controller (4.3"), for temperature adjustment on heating convectors (HC) and fan coils (FANCOIL)			 	
Type / WG02 control outputs	Communi-cation	Measuring elements / controller	Colour / Housing	Display	Item no.	Price
[1] 3 AO (heating, cooling, 6-way valve, EC fan, 0-10 V)						
RYMASKON® 203x C MOD		T F R B L	Iduna 5			
RYM 2031C-RH-MOD	Modbus	T RH	white	■	RYM2-0311-M210-000	478,40 €
RYM 2032C-RH-MOD	Modbus	T RH	black	■	RYM2-0321-M210-000	478,40 €
RYM 2031C-RH-CO2-MOD	Modbus	T RH CO2	white	■	RYM2-0311-M610-000	569,92 €
RYM 2032C-RH-CO2-MOD	Modbus	T RH CO2	black	■	RYM2-0321-M610-000	569,92 €
RYM 2031C-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	white	■	RYM2-0311-M810-000	652,08 €
RYM 2032C-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	black	■	RYM2-0321-M810-000	652,08 €
RYMASKON® 203x C WMOD		T F R B L	Iduna 5			
RYM 2031C-RH-WMOD	W-Modbus	T RH	white	■	RYM2-0311-W210-000	561,60 €
RYM 2032C-RH-WMOD	W-Modbus	T RH	black	■	RYM2-0321-W210-000	561,60 €
RYM 2031C-RH-CO2-WMOD	W-Modbus	T RH CO2	white	■	RYM2-0311-W610-000	653,12 €
RYM 2032C-RH-CO2-WMOD	W-Modbus	T RH CO2	black	■	RYM2-0321-W610-000	653,12 €
RYM 2031C-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	white	■	RYM2-0311-W810-000	735,28 €
RYM 2032C-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	black	■	RYM2-0321-W810-000	735,28 €
[2] 2 AO (heating, cooling, EC fan, 0-10 V) + 2 DO (heating, cooling, 24 V, max. 1 A resistive load)						
RYMASKON® 206x C MOD		T F R B L	Iduna 5			
RYM 2061C-RH-MOD	Modbus	T RH	white	■	RYM2-0611-M210-000	478,40 €
RYM 2062C-RH-MOD	Modbus	T RH	black	■	RYM2-0621-M210-000	478,40 €
RYM 2061C-RH-CO2-MOD	Modbus	T RH CO2	white	■	RYM2-0611-M610-000	569,92 €
RYM 2062C-RH-CO2-MOD	Modbus	T RH CO2	black	■	RYM2-0621-M610-000	569,92 €
RYM 2061C-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	white	■	RYM2-0611-M810-000	652,08 €
RYM 2062C-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	black	■	RYM2-0621-M810-000	652,08 €
RYMASKON® 206x C WMOD		T F R B L	Iduna 5			
RYM 2061C-RH-WMOD	W-Modbus	T RH	white	■	RYM2-0611-W210-000	561,60 €
RYM 2062C-RH-WMOD	W-Modbus	T RH	black	■	RYM2-0621-W210-000	561,60 €
RYM 2061C-RH-CO2-WMOD	W-Modbus	T RH CO2	white	■	RYM2-0611-W610-000	653,12 €
RYM 2062C-RH-CO2-WMOD	W-Modbus	T RH CO2	black	■	RYM2-0621-W610-000	653,12 €
RYM 2061C-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	white	■	RYM2-0611-W810-000	735,28 €
RYM 2062C-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	black	■	RYM2-0621-W810-000	735,28 €



Type 20x1



Type 20x2

HIGHLIGHTS 2000

- 4.3" TFT display (800x480x3 RGB pixels) with LED backlighting, high contrast, 85° viewing angle
- Iduna 5 housing (approx. 129x88 mm)
- Modbus connection or wireless W-Modbus
- Integrated sensor technology (temperature, humidity, CO2, VOC) with limit value monitoring
- Regulation of heating, cooling, fan via Modbus/W-Modbus
- Control of temperature and fans, as well as up to 4 sun protection and light circuits
- 8 scenes with start and end time (e.g. meeting, cinema, holiday, etc.)
- 'Please do not disturb' (e.g. in hotels, offices, practices)
- Power-saving and environmentally friendly thanks to features such as automatic brightness adjustment, stand-by, wake-up, etc.
- CuRA (Customized Register Assignment)
Assignment of individual register addresses for each data point

RYMASKON® 2000**Interface (4.3")**

Room control units with touch display

Type / WG02	Communi- cation	Measuring elements / controller	Colour / Housing	Display	Item no.	Price
RYMASKON® 2000 MOD		T F R B L	Iduna 5			
RYM 2001-RH-MOD	Modbus	T RH	white	■	RYM2-0011-M210-000	452,40 €
RYM 2002-RH-MOD	Modbus	T RH	black	■	RYM2-0021-M210-000	452,40 €
RYM 2001-RH-CO2-MOD	Modbus	T RH CO2	white	■	RYM2-0011-M610-000	543,92 €
RYM 2002-RH-CO2-MOD	Modbus	T RH CO2	black	■	RYM2-0021-M610-000	543,92 €
RYM 2001-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	white	■	RYM2-0011-M810-000	626,08 €
RYM 2002-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	black	■	RYM2-0021-M810-000	626,08 €
RYMASKON® 2000 WMOD		T F R B L	Iduna 5			
RYM 2001-RH-WMOD	W-Modbus	T RH	white	■	RYM2-0011-W210-000	535,60 €
RYM 2002-RH-WMOD	W-Modbus	T RH	black	■	RYM2-0021-W210-000	535,60 €
RYM 2001-RH-CO2-WMOD	W-Modbus	T RH CO2	white	■	RYM2-0011-W610-000	627,12 €
RYM 2002-RH-CO2-WMOD	W-Modbus	T RH CO2	black	■	RYM2-0021-W610-000	627,12 €
RYM 2001-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	white	■	RYM2-0011-W810-000	709,28 €
RYM 2002-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	black	■	RYM2-0021-W810-000	709,28 €

RYMASKON® 3000**Interface (5.0")**

Room control units with touch display

Type / WG02	Communi- cation	Measuring elements / controller	Colour / Housing	Display	Item no.	Price
RYMASKON® 3000 MOD		T F R B L	Iduna 6			
RYM 3001-RH-MOD	Modbus	T RH	white	■	RYM3-0011-M210-000	465,00 €
RYM 3002-RH-MOD	Modbus	T RH	black	■	RYM3-0021-M210-000	465,00 €
RYM 3001-RH-CO2-MOD	Modbus	T RH CO2	white	■	RYM3-0011-M610-000	553,00 €
RYM 3002-RH-CO2-MOD	Modbus	T RH CO2	black	■	RYM3-0021-M610-000	553,00 €
RYM 3001-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	white	■	RYM3-0011-M810-000	632,00 €
RYM 3002-RH-CO2-VOC-MOD	Modbus	T RH CO2 VOC	black	■	RYM3-0021-M810-000	632,00 €
RYMASKON® 3000 WMOD		T F R B L	Iduna 6			
RYM 3001-RH-WMOD	W-Modbus	T RH	white	■	RYM3-0011-W210-000	566,80 €
RYM 3002-RH-WMOD	W-Modbus	T RH	black	■	RYM3-0021-W210-000	566,80 €
RYM 3001-RH-CO2-WMOD	W-Modbus	T RH CO2	white	■	RYM3-0011-W610-000	658,32 €
RYM 3002-RH-CO2-WMOD	W-Modbus	T RH CO2	black	■	RYM3-0021-W610-000	658,32 €
RYM 3001-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	white	■	RYM3-0011-W810-000	740,48 €
RYM 3002-RH-CO2-VOC-WMOD	W-Modbus	T RH CO2 VOC	black	■	RYM3-0021-W810-000	740,48 €

OPTIONS

Equipment:

**measuring elements
(sensors)**

T = temperature [°C/°F]
RH = relative humidity [%]
CO2 = carbon dioxide [ppm]
VOC = air quality [%]

Controller


T = temperature
F = fan
R = room occupancy
B = sun protection (blind)
L = light

Type versions:

Combined measuring elements **T | RH | VOC** on request
 On-wall housing on request

UPGRADE 3000

- 5.0" TFT display (800x480x3 RGB pixels)
- Iduna 6 housing (approx. 143 x 98 mm)
- Control of 20 circuits each for sun protection and light with dimming function
- Additional multi-room control (up to 5 rooms)

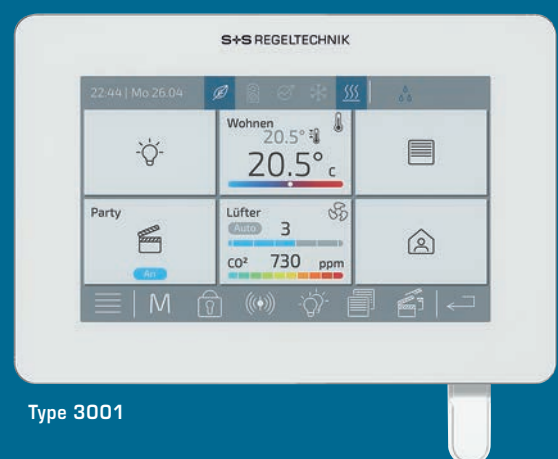

Type 3001



S+S REGELTECHNIK

PART OF
BEMSIQ
GROUP



The new S+S company headquarters on a total area of 14,000 m² in Nordostpark on the outskirts of Nuremberg offers a seamlessly integrated production and development environment with excellent air and road links.

S+S stands for a fully integral value chain. All products are designed, developed, manufactured and programmed in-house.

Development, manufacturing and sales in Nuremberg are certified by TÜV Thüringen according to DIN EN ISO 9001:2015 (quality management) and DIN EN ISO 14001:2015 (environmental management).

All devices are function tested as well as calibrated in-house prior to shipment and meet strict safety, quality and sustainability standards.



S+S REGELTECHNIK GMBH
THURN-UND-TAXIS-STR. 22
90411 NUREMBERG / GERMANY

PHONE +49 (0) 911 / 5 19 47-0

mail@SplusS.de

www.SplusS.de

Prices by S+S are understood plus legal value added tax at the respective rate in effect. All information provided without prejudice, technical modifications and price changes reserved. Reprints, even excerpts, are only permitted with the approval of S+S Regeltechnik GmbH.

You can find technical data and further information in our catalogue or web shop.



Order conveniently online: www.SplusS.de